

MG MOTORS - UK

Tile Specification 2024



minoli 65^{years}

MINOLI

Contact Information

Jonathon Minoli
Managing Director

Sophie Doran
Sales Administration

Lucy Minoli
Showroom & Sales

jonathon@minoli.co.uk

sophie@minoli.co.uk

lucy@minoli.co.uk

MINOLI

Transport Way
Cowley
Oxford
OX4 6LX
United Kingdom

T. +44 (0)1865 77 82 25
F. +44 (0)1865 74 76 42


www.minoli.co.uk
info@minoli.co.uk



minoli

Showroom Tile

Option 1 - 60/60

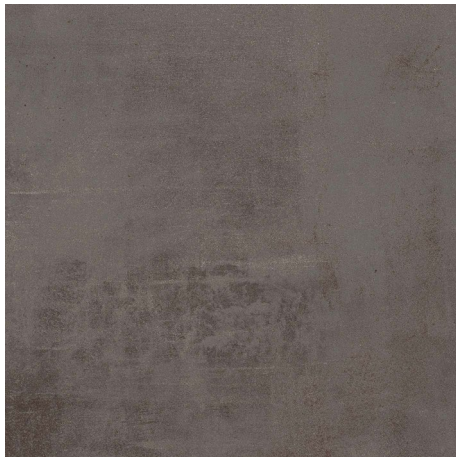

BST Smoke 60 Matt

60/60 - 595 x 595 x 9 mm

Stock Code: MG1001

£ 26.00 per MT2

TECHNICAL FEATURES

Rectified Porcelain Stoneware

Slip Resistance: R10 - PTV (≥ 36 Wet & Dry)

PACKAGING DETAILS

Pallet

120 tiles per pallet

43.20 MT² per pallet

40 boxes per pallet

862.80 kgs per pallet

Box

3 tiles per box

1.08 MT² per box

21.57 kgs per box

Pallet Dimensions - 80 x 120 x 80 cm

Showroom Tile

Option 2 - 75/75



BST Smoke 75 Matt

75/75 - 745 x 745 x 9 mm

Stock Code: MG1002

£ 28.00 per MT2

TECHNICAL FEATURES

Rectified Porcelain Stoneware

Slip Resistance: R10 - PTV (≥ 36 Wet & Dry)

PACKAGING DETAILS

Pallet

84 tiles per pallet

47.25 MT² per pallet

42 boxes per pallet

890.40 kgs per pallet

Box

2 tiles per box

1.125 MT² per box

21.20 kgs per box

Pallet Dimensions - 80 x 120 x 90 cm

Technical Data Sheet

BST Smoke



	Technical features	Test method	Requisites for nominal size N			Matte rectified 9mm
			7 cm ≤ N < 15 cm	N ≥ 15 cm		
			(mm)	(%)	(mm)	
Regularity features	 Length and width Thickness Straightness of sides Perpendicularity (Measurement only on short edges when L/l ≥ 3)	ISO 10545-2	± 0,9 (*) Non-rect. ± 0,4 (*) Rect.	± 0,6 (*) Non-rect. ± 0,3 (*) Rect.	± 2,0 (*) Non-rect. ± 1,0 (*) Rect.	Suitable for
			± 0,5 (**)	± 5 (**)	± 0,5 (**)	Suitable for
			± 0,8 (***) Non-rect. ± 0,4 (***) Rect.	± 0,5 (***) Non-rect. ± 0,3 (***) Rect.	± 1,5 (***) Non-rect. ± 0,8 (***) Rect.	Suitable for
			± 0,8 (***) Non-rect. ± 0,4 (***) Rect.	± 0,5 (***) Non-rect. ± 0,3 (***) Rect.	± 2,0 (***) Non-rect. ± 1,5 (***) Rect.	Suitable for
	 Surface flatness	ISO 10545-2	c.c. ± 0,8 Non-rect. c.c. ± 0,6 Rect.	c.c. ± 0,5 Non-rect. c.c. ± 0,4 Rect.	c.c. ± 2,0 Non-rect. c.c. ± 1,8 Rect.	Suitable for
			e.c. ± 0,8 Non-rect. e.c. ± 0,6 Rect.	e.c. ± 0,5 Non-rect. e.c. ± 0,4 Rect.	e.c. ± 2,0 Non-rect. e.c. ± 1,8 Rect.	
Structural features	 Water absorption level (in% by mass)	ISO 10545-3	E ≤ 0,5% Individual Maximum 0,6%			≤ 0,1%
		ASTM C373-18	Requirement ANSI A137.1-2017 Water Absorption Max < 0,5%			≤ 0,5%
Bulk mechanical features	Breaking strenght	ISO 10545-4	S ≥ 700N (for thickness < 7,5mm) S ≥ 1300N (for thickness ≥ 7,5mm)			S ≥ 1500 N
	Bending resistance		R ≥ 35 N/mm ²			R ≥ 40 N/mm ²
	Bending and breaking load resistance ⁽⁴⁾⁽⁵⁾	EN 1339 Annex F	-			
	Impact resistance	ISO 10545-5	Declared value			≥ 0,55
Surface mechanical features	 Deep abrasion resistance of unglazed tiles	ISO 10545-6	≤ 175 mm ³			≤ 150mm ³

Technical Data Sheet

BST Smoke



	Technical features	Test method	Requisites for nominal size N			Matte rectified 9mm
			7 cm ≤ N < 15 cm		N ≥ 15 cm	
			(mm)	(%)	(mm)	
Thermo-igrometric features	Coefficient of linear thermal expansion	ISO 10545-8	Declared value			≤7MK ⁻¹
	Thermal shock resistance	ISO 10545-9	Test passed in accordance with ISO 10545-1			Resistant
	Moisture expansion (in mm/m)	ISO 10545-10	Declared value			≤0.01% (0.1mm/m)
	Frost resistance	ISO 10545-12	Test passed in accordance with ISO 10545-1			Resistant
Physical properties	Bond strenght	EN 1348	Declared value			≥1.0 N/mm ² (Class C2 - EN 12004)
	Reaction to fire	-	Class A1 or A1 _{fl}			A1 - A1 _{fl}
Chemical features	Resistance to household chemicals and swimming pool salts	ISO 10545-13	Minimum B class			A
	Resistance to low concentrations of acids and alkalis		Declared class			LA
	Resistance to high concentrations of acids and alkalis		Declared class			HA
	Stain resistance	ISO 10545-14	Declared class			5
Safety characteristics (1)(2)		Booted ramp test	DIN EN 16165 ANNEX B (EX DIN 51130)	Declared class		R10
		Barefoot Ramp test	DIN EN 16165 ANNEX A (EX DIN 51097)	Declared value		A+B
		Pendulum friction Test	BS EN 16165 ANNEX C (EX BS 7976)	PTV ≥ 36 classifies the surface as "low slip risk"		≥36Dry ≥36Wet
			AS 4586	Declared Classification of the new pedestrian surface materials according to the Pendulum Test		Class P3
		UNE 41901 EX:2017	Declared value		Class C2	
		Coefficient of friction	B.C.R.A. Rep. CEC/81	Min. Dec. 236/89 of 14/06/89 μ >0.40 for a sliding leather element on a dry floor μ >0.40 for a sliding hard rubber element on a wet floor		>0.40Asciutto >0.40Bagnato
		Dynamic coefficient of friction (DCOF)	ANSI A 326.3	-		Wet DCOF ≥ 0.50

* Permitted deviation, in % or mm, from the average size of each tile (2 or 4 sides) with respect to the manufacturing size (W).

** Permitted deviation, in % or mm, from the average thickness of each tile with respect to the cited manufacturing thickness (W).

*** Maximum permitted straightness deviation, in % or mm, with respect to the corresponding manufacturing sizes (W).

**** Maximum permitted perpendicularity deviation, in % or mm, with respect to the corresponding manufacturing sizes (W).

**** Maximum permitted centre curvature deviation, in % or mm, with respect to the diagonal calculated according to manufacturing sizes (W).

e.c. Maximum permitted corner curvature deviation, in % or mm, with respect to the corresponding manufacturing sizes (W).

w. Maximum permitted bending deviation, in % or mm, with respect to the diagonal calculated according to manufacturing sizes (W).

(1) Determining the slip resistance of pedestrian surfaces; not applicable to sports flooring or road traffic flooring.

(2) The anti-slip performance is guaranteed at the time of delivering the product.

(3) However, tiles with a DCOF of 0.42 or greater are not necessarily suitable for all projects. The specifier shall determine tiles appropriate for specific project conditions, considering by way of example, but not in limitation, type of use, traffic, expected contaminants, expected maintenance, expected wear, and manufacturers' guidelines and recommendations."

(4) For further details, please refer to the outdoor design general catalogue.

(5) Only for products with 20 mm thickness

WORKSHOP

Floor Options



STG - Dakota PGR (R9)

20/20 - 12 mm

Stock Code: MG1003

£ 23.00 per MT2

TECHNICAL FEATURES

Full Body Porcelain Stoneware

Slip Resistance: R9 (R11 available on request)

Technical characteristics	Frost proof Resistance deep abrasion
Intended use	Materials suitable for situations of relatively hard abrasion in environments without protection against scratching, both public and private.

Anti-slip rating

Ramp Test Shoes	R9
Ramp Test Barefoot	A
BCR	> 0.40
Spain PTV	Class 1
UK PTV	36+ Slider 96

PACKAGING DETAILS

Pallet

1080 tiles per pallet

43.2 MT² per pallet

54 boxes per pallet

1190 kgs per pallet

Box

20 tiles per box

0.8 MT² per box

22.00 kgs per box

Tiles are delivered on slightly 'overweight' pallets at 1,190 kgs per pallet.

A Forklift or JCB-Type Handler will be required on site to offload the pallets. Should this not be viable then a quotation can be obtained for delivery with Moffett portable forklift truck.

WORKSHOP

Wall



W.R CEMENTO

20/20 - 7.2 mm
Stock Code: MG1004

£ 16.00 per MT2

TECHNICAL FEATURES

Ceramic

PACKAGING DETAILS

Pallet

2625 tiles per pallet
105 MT² per pallet
75 boxes per pallet
1312.5 kgs per pallet

Box

35 tiles per box
1.4 MT² per box
17.50 kgs per box

Tiles are delivered on slightly 'overweight' pallets at 1,312.5 kgs per pallet.

A Forklift or JCB-Type Handler will be required on site to offload the pallets. Should this not be viable then a quotation can be obtained for delivery with Moffett portable forklift truck.

ORDER FORM

Prices



TYPE	SPECIFIED TILE	STOCK CODE	SIZE		PRICE PER MT2	QUANTITY	VALUE
Showroom Floor - Option 1	BST Smoke 60 Matt	MG1001	60/60	9 mm	£ 26.00 EUR
Showroom Floor - Option 2	BST Smoke 75 Matt	MG1002	75/75	9 mm	£ 28.00 EUR
Workshop Floor	STG - Dakota PGR (R9)	MG1003	20/20	12 mm	£ 23.00 EUR
Workshop Wall	W.R Cemento	MG1004	20/20	7.2 mm	£ 16.00 EUR

WHEN ORDERING PLEASE ALLOW 5-10% EXTRA FOR WASTAGE

YOUR COMPANY DETAILS

COMPANY NAME
.....

DEALER REF
.....

COMPANY ADDRESS
.....
.....
.....

TEL
.....

EMAIL
.....

YOUR ORDER DETAILS

ORDER NUMBER OR REFERENCE
.....

PREFERED DELIVERY DATE
.....

DELIVERY ADDRESS
.....
.....
.....

TEL
.....

EMAIL
.....

DELIVERY COST

MOFFETT COST

TOTAL COST



PLEASE RETURN THIS COMPLETED FORM TO
sophie@minoli.co.uk or Jonathon@minoli.co.uk

MINOLI TERMS



ADHESIVE AND GROUT

A full technical service is offered by Minoli and our adhesive manufacturers. A general written specification for both workshop and Showroom tiling is available on request. However, a site visit by a technical representative is often better in order to provide an individual specification for each surface area.

DELIVERY

AVAILABILITY	21 - 28 days (if not stock)
PRICES	All prices firm until 31 December 2024
PAYMENT	Strictly pro-forma invoice with order

BANK DETAILS

BANK	Santander
ACCOUNT	Minoli & Co. Ltd
SORT CODE:	09-07-20
ACCOUNT NUMBER:	04387511

PLEASE NOTE

This literature is intended as a guide only, print cannot reproduce a true likeness of colour, tone or texture.

ORDER PROCESS



1. Contractor/client/dealer (appointed purchaser) contacts Minoli with written order to include full invoice, delivery details and quantities required of each item. Wastage to be considered (5-10%) by purchaser.
2. Minoli sends via email/fax a pro-forma invoice as confirmation of order, for client's consideration.
3. Contractor/Client/Dealer (Appointed Purchaser) checks thoroughly the pro-forma from Minoli and if satisfied signs and emails/faxes back to Minoli as confirmation.
4. Minoli begin order preparation and enters into delivery and payment discussion/correspondence.
5. Payment is sent to Minoli. Shipping and packaging/consignment details are sent to client.*
6. Order is delivered to specified location.*
7. Upon delivery order MUST be checked by client/client's agent against their order, pro-forma and consignment notes.
8. Any queries to be notified to Minoli immediately and Minoli will respond accordingly.

*A Forklift or JCB-Type Handler may be required on site to offload the pallets.
Should this not be viable then a quotation can be obtained for delivery with Moffett portable forklift truck.

see beyond the surface

Why Minoli?

minoli 65^{years}

MINOLI - SPECIALISING IN PORCELAIN TILES FOR AUTOMOTIVE RETAIL

With a longstanding reputation for supporting automotive manufacturers and retailers in achieving consistency of corporate identity, nationally and internationally, Minoli has high levels of expertise and exceptional customer service that are considered second to none.

Over the years we have supplied specialist porcelain showroom and workshop tiles to some 20 manufacturer brands and their networks, plus a range of motorcycle, collector and tuning specialists, as well as garaging solutions for private individuals.

With market-leading standards in supplying the automotive industry, Minoli understand the requirement to minimise the downtime of a dealership during development and to ensure deliveries are reliably completed in line with ambitious build and fit-out schedules.

With a significant stock-holding capacity, most orders are delivered promptly in complete packages, enabling clients and contractors to proceed smoothly through the build programme. In order to fulfil major roll-out programs, Minoli hold vast stocks of each client's individually specified porcelain tile selections, predominantly produced to order for each brand.

Where required, we also liaise directly with retail group owners, dealership management, contractors and tile fitters on behalf of the manufacturer brands, to ensure scheme fidelity across diverse networks, both in the UK, and with pan-European and Global remits.

The automotive team is led by Managing Director, Jonathon Minoli, who would be delighted to discuss opportunities to support other manufacturers and specialists: jonathon@minoli.co.uk



minoli 65^{years}

info@minoli.co.uk | www.minoli.co.uk | 01865 778 225 (Oxford) | 020 7474 2934 (London)